

INCLUDED IN KIT:

SB1



x1

CB15S



x4

3/8" Carriage Bolt 1.5 Inches long

NL38



x4

3/8" K-Lock Nut

TPU1



x1

AK1



x2

FRHS1



x1

FRI01



x2

CHR1



x2

SCS251



x6

#10 Machine Screw 1 Inch long

NL10



x6

#10 K-Lock Nut


ST075



x2

TOOLS REQUIRED:

9/16" SOCKET WITH RATCHET TO SUIT
OR 9/16" BOX WRENCH



OR



1

NL38



x4

TPU1



x1

SB1




x1

CB15S



x4

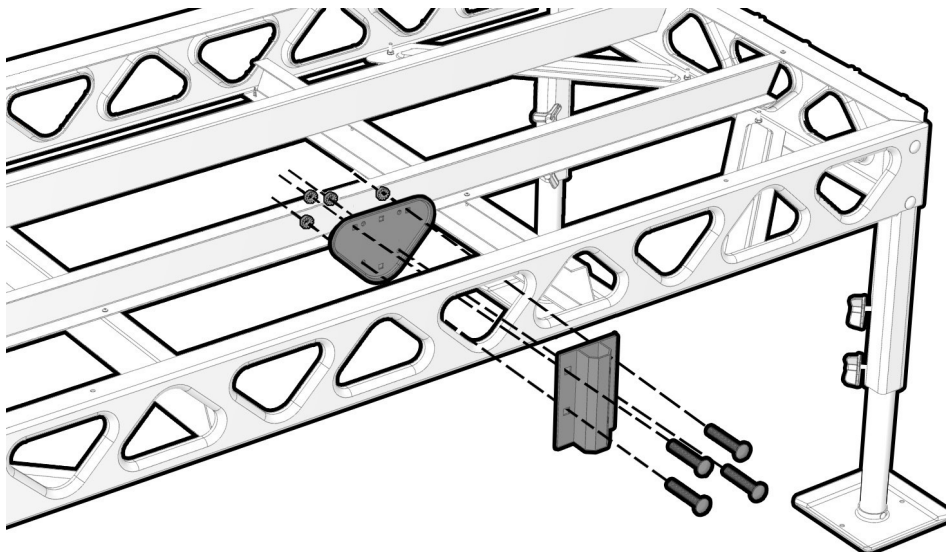

Place bracket for fishing rod holder in the desired location on your dock. Ensure the bracket does not obstruct any other accessories installed on your dock. Assemble bracket assembly as shown.


PLEASE NOTE: Some elements in the above image have been hidden to better illustrate assembly.

2

AK1



x2

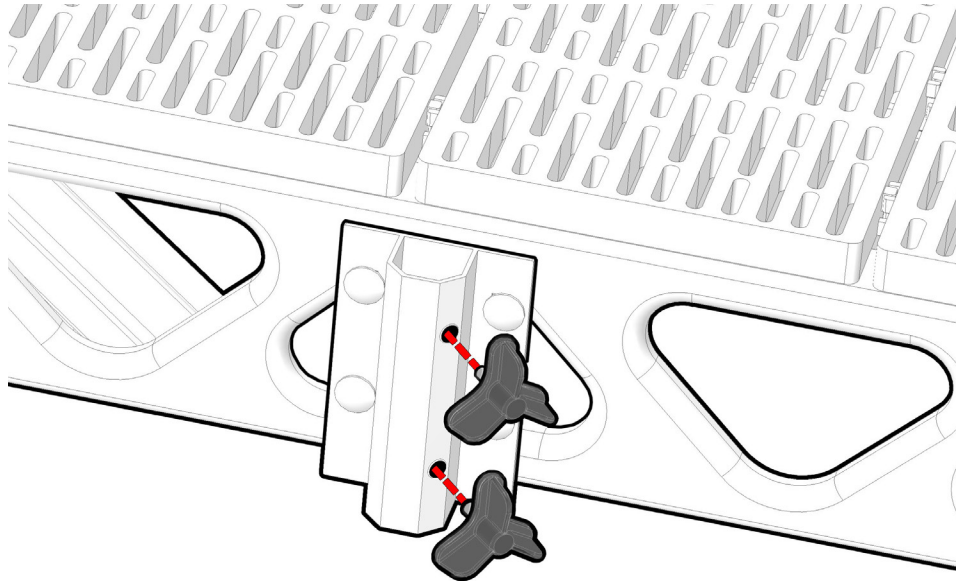

Connect the adjustment knobs (**AK1**) on the side of the rack holder (**SB1**).
Keep knobs loose to allow the rack/holder to slide into position.

3

FRHS1



x1

FRHI1



x2



4

SCS251




x6


NL10



x6

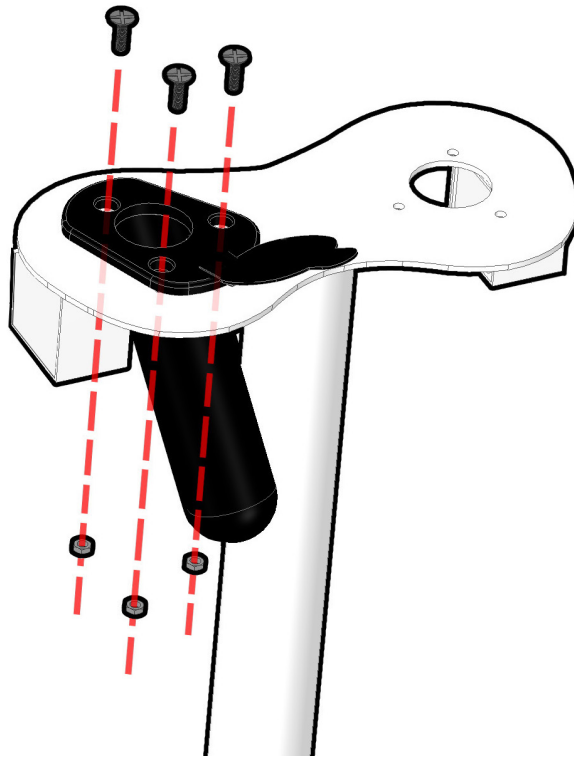

5

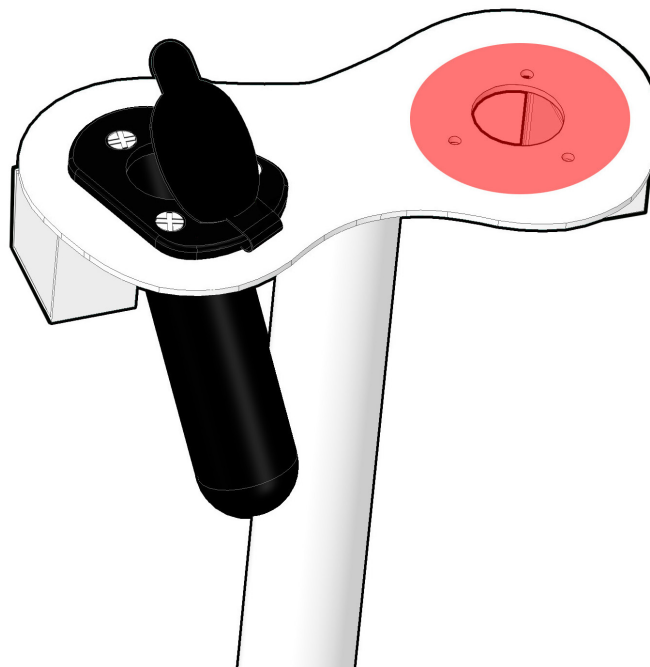




Repeat **Steps 3-4** for adding the second insert.

6

CHR1



X2

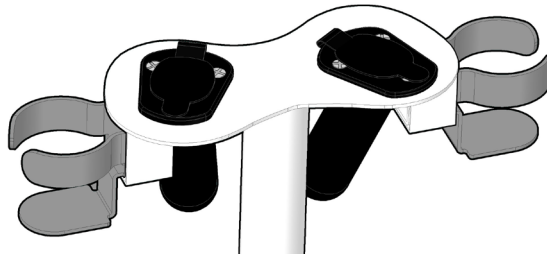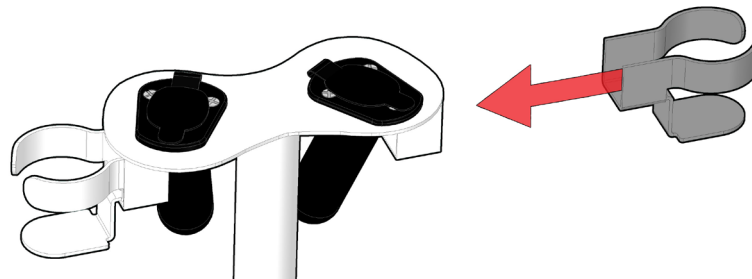
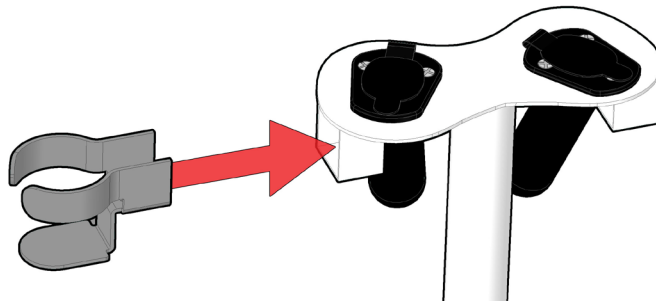


7

ST075




X2

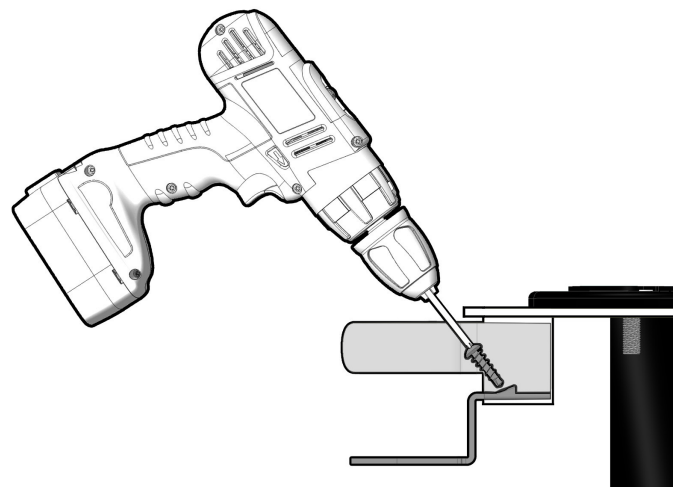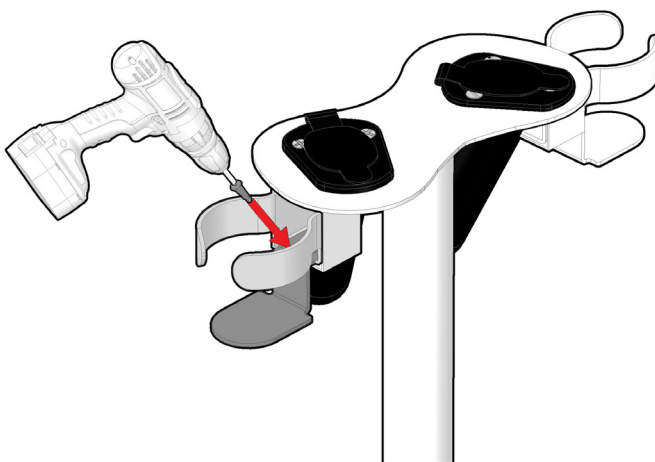



Add screw to fasten the cup holder. Repeat for cupholder on the opposite side of the fishing rod holder.

8

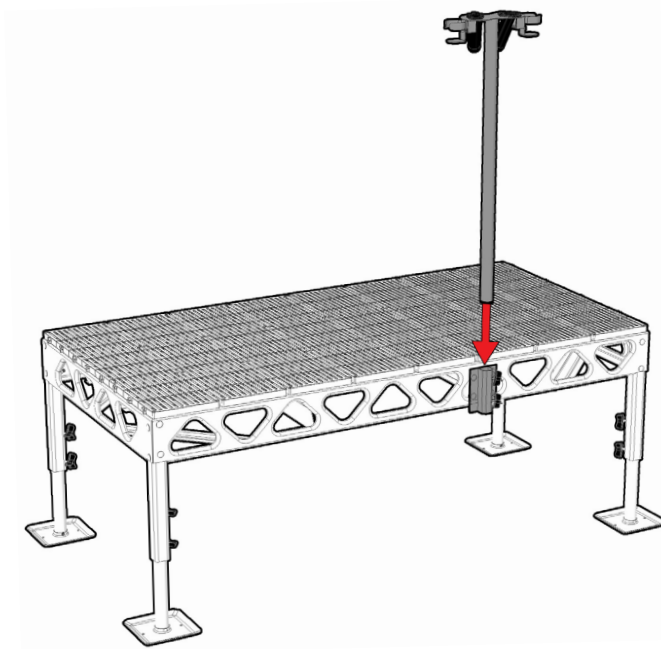

Adjust the stand to a comfortable height for holding your fishing rod.

9

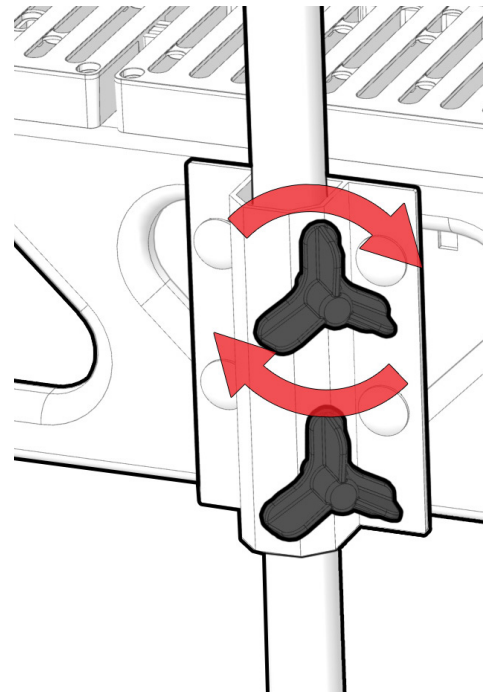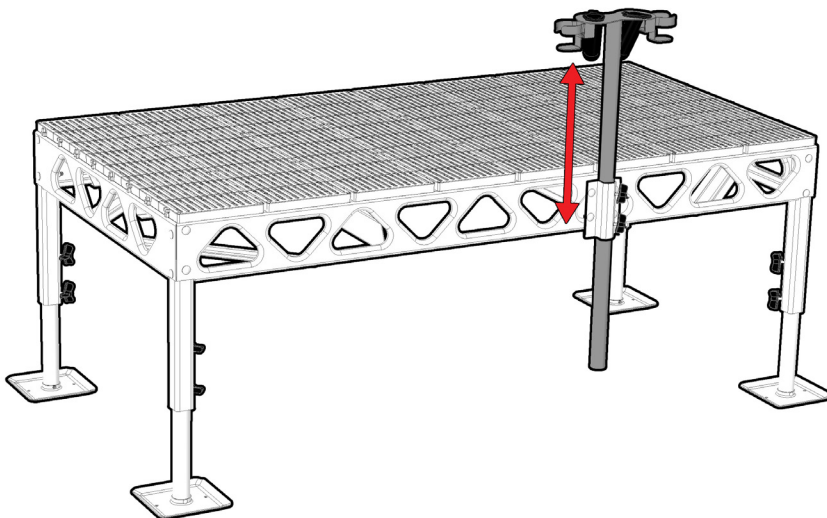

Once you have determined the rod height tighten both adjustment knobs.

10

