









INCLUDED IN KIT:		
Kayak Rack:	Paddle Rack	
		
OR		
KR1 x2	PBH1 x2	
SB1		x2
CB15S		x8
NL38		x8
TPU1		x2
AK1		x4

TOOLS REQUIRED:


9/16" SOCKET WITH RATCHET TO SUIT
OR 9/16" BOX WRENCH



OR



1

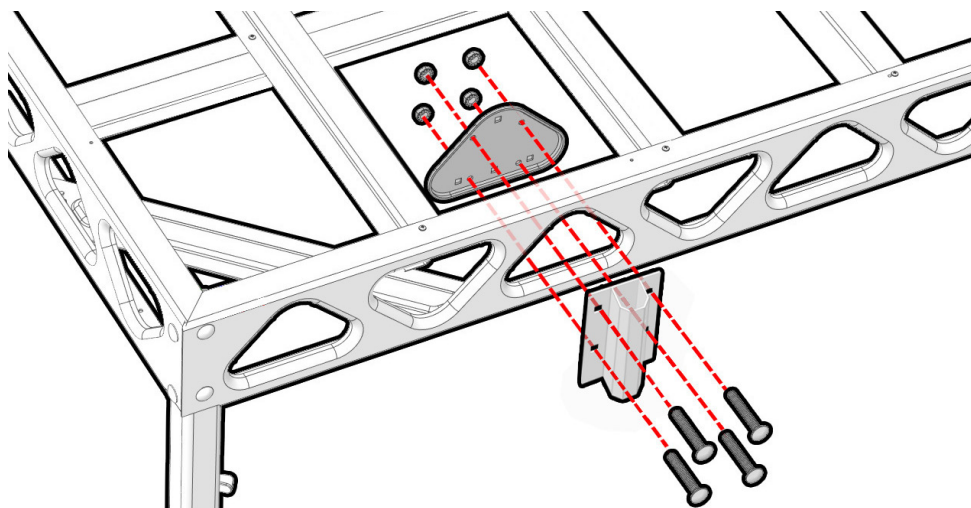

TPU1  x1


SB1  x1

CB15S  x4



NL38  x4

Connect the rack holder bracket (SB1) and triangle plate (TPU1) to the truss using carriage bolts (CB15S) and lock nuts (NL38).
PLEASE NOTE: The decking has been removed from the image to better illustrate installation.

2

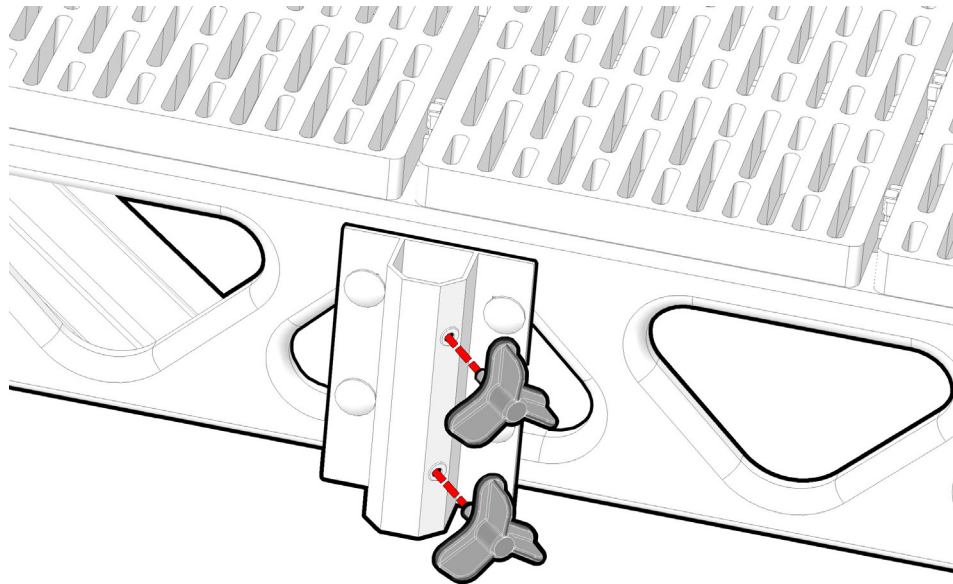


AK1 x2

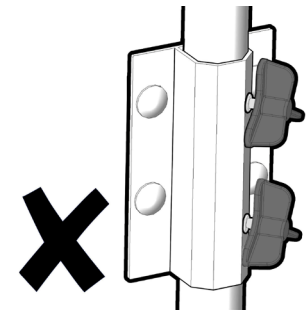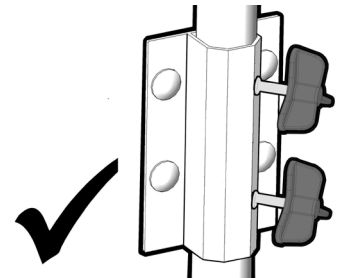


Connect the clamping knobs (AK1) to the side of the rack holder (RH1). Keep knobs loose to allow the rack/holder to slide into position.

3

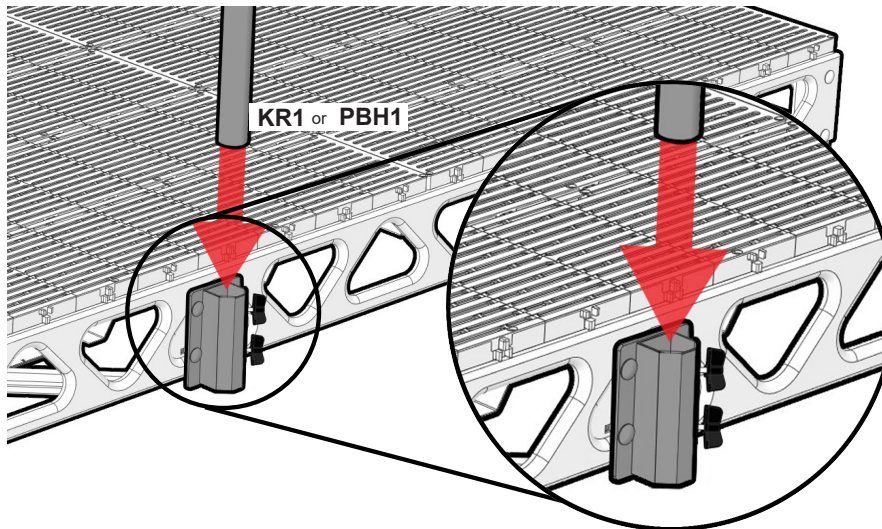


Tighten both
Adjustment Knobs




Adjust the height of rack/holder (KR1/PBH1) and tighten both adjustable knobs (AK1) by turning the handles clock-wise. Follow steps 1-3 for installing the second paddle rack/kayak rack and holder bracket.

PLEASE NOTE: Set the distance between brackets to match the size of the kayaks/ paddle boards you will use for the racks.

Additional information for the Kayak Rack:

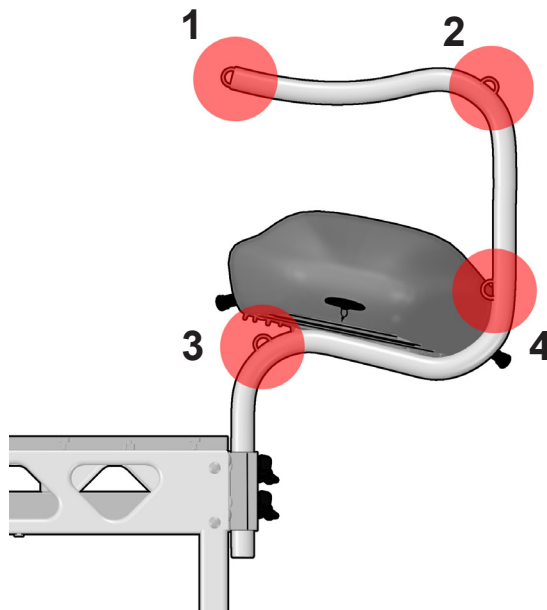

Each Kayak Rack frame has 4 hitch points for securing watercraft.

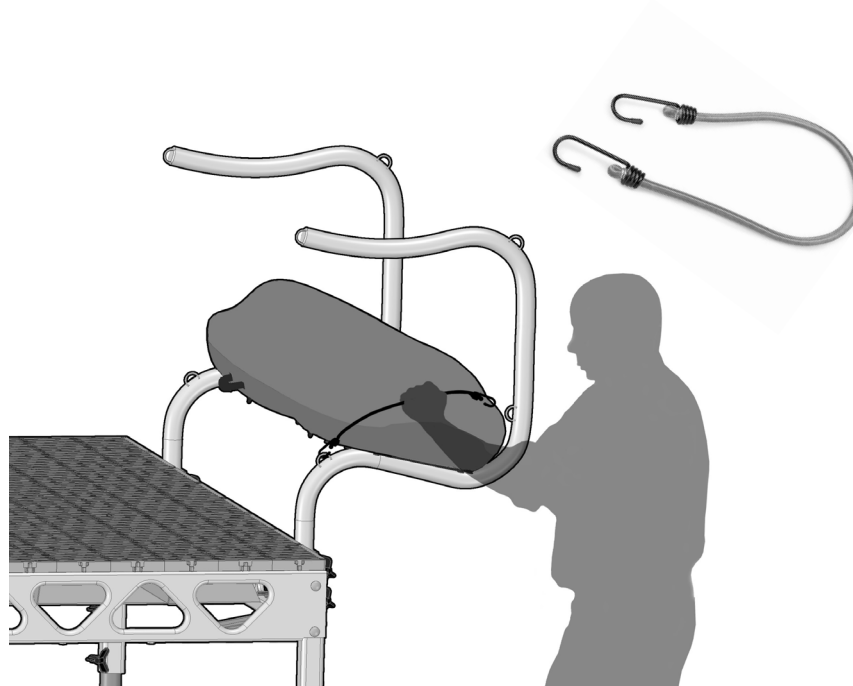

Bungee cables may be used to securely strap watercraft in place.