



1

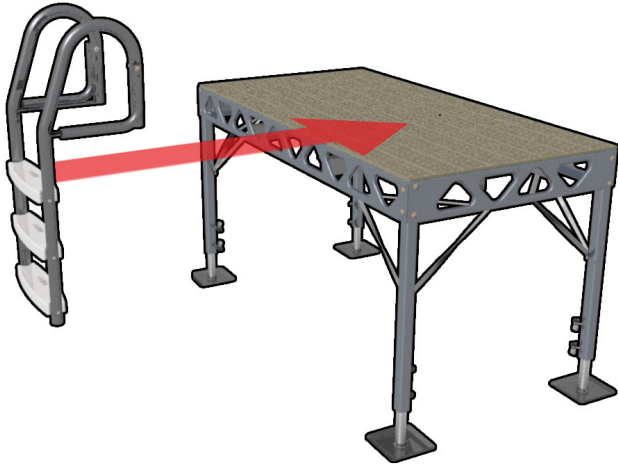

Place ladder assembly onto the dock. **PLEASE NOTE: Ensure that the ladder is placed in an area that will not interfere with accessories connected to the dock. It is possible the ladder can interfere with accessories or other items placed on the dock when it is in the flipped up position.**

2

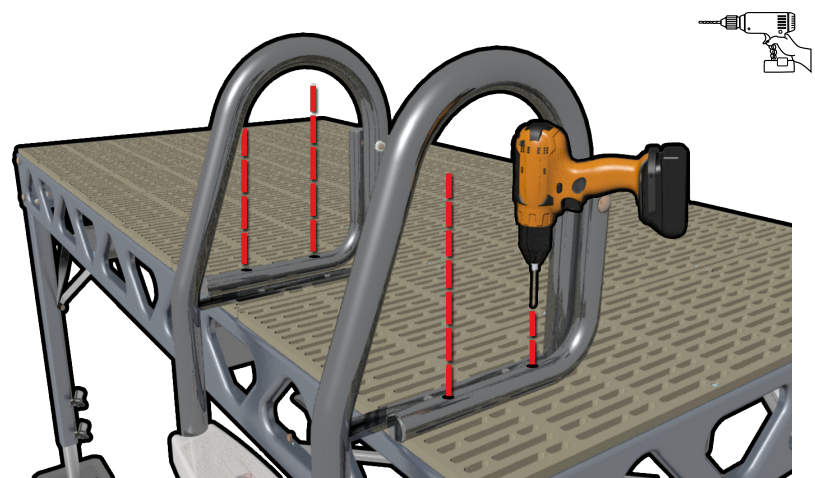


With the ladder frame flush against the dock use the L-Shaped Bracket holes as a guide to drill through the surface of the decking to accommodate the hardware for fastening the ladder to the dock. Drill holes on one side of the ladder before continuing the opposite side.




Always wear personal protection to avoid injury.

3

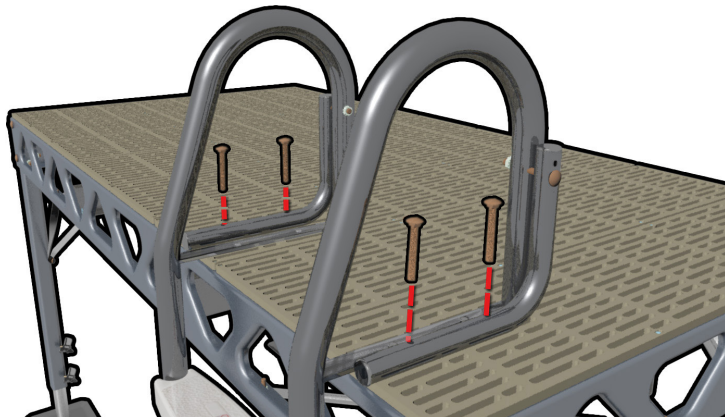


Place carriage bolts inside of the drilled holes.

4

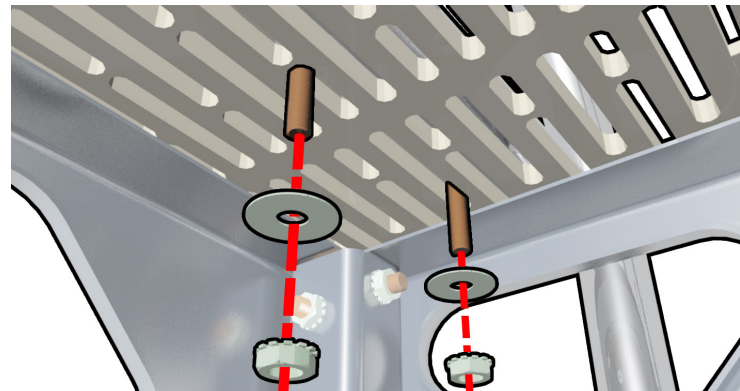


From underneath the dock connect a washer and nut to each carriage bolt. Do this for all four bolts and tighten.

5 •

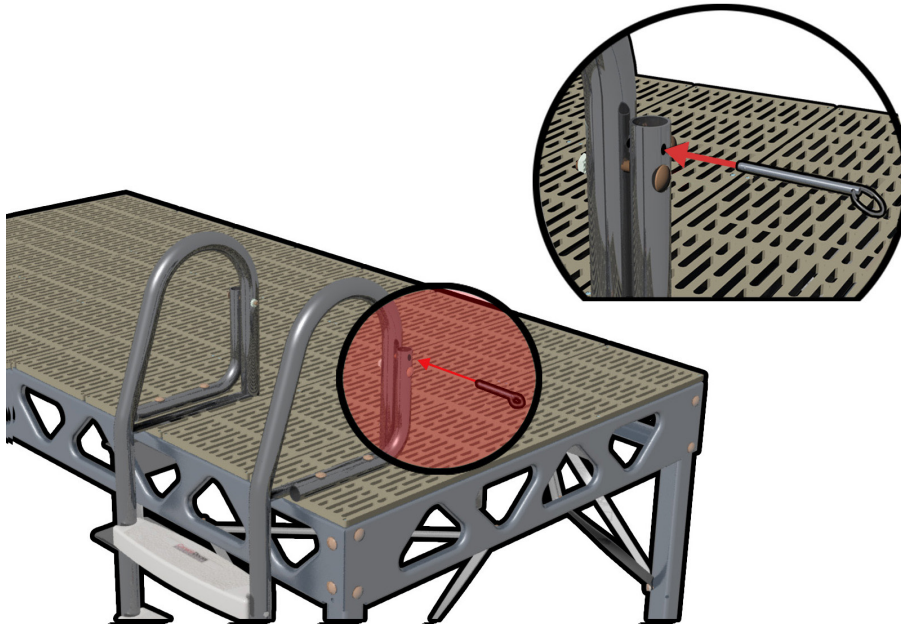


Place the locking pin in the bottom hole.

6 •

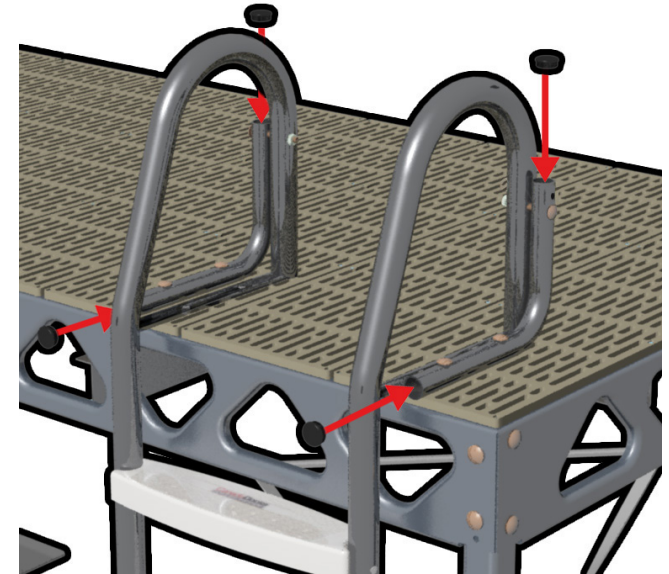

Place the large plastic caps in the areas shown.

7 •

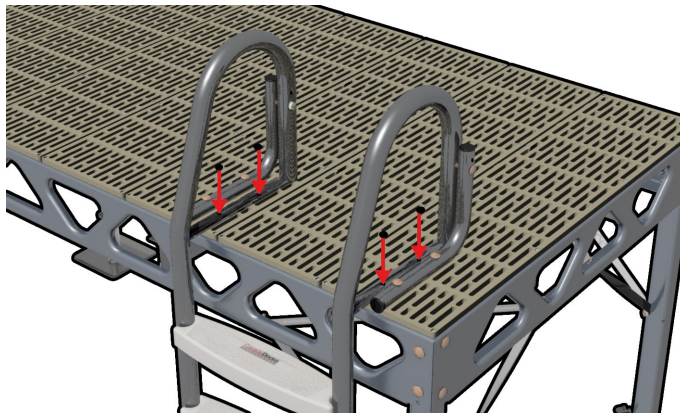

Place the small plastic caps in the areas shown.