


INCLUDED:


- Anchor Chain Shock Absorber Cord with Metal Connectors

ACTC1




X1

**PLEASE NOTE:** When ordering your Anchor Chain Tension Cord please let us know the difference between the low tide and high tide (in inches) at your dock location. This will determine the length of each Cord needed for your dock.

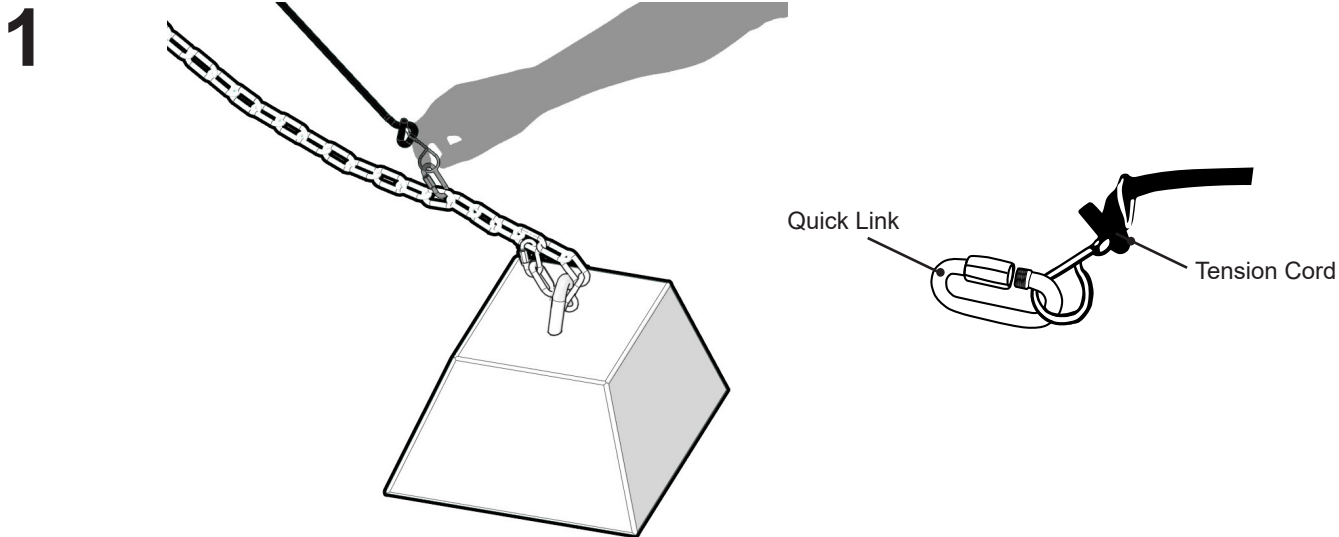


Attach the Quick Link connected to the Tension Cord onto the bottom part of the chain that is **easily accessible to you**.

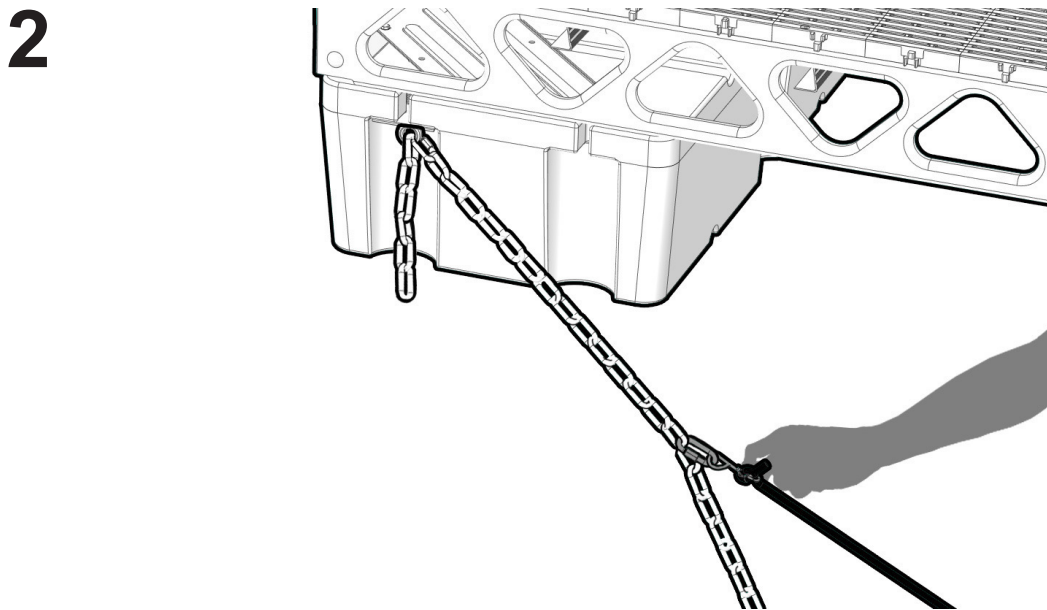

Pull the Quick Link connected to the Tension Cord upwards to the dock. When there is tension on the cord connect the quick link connected on the Tension Cord to the chain.

## 2 (continued)

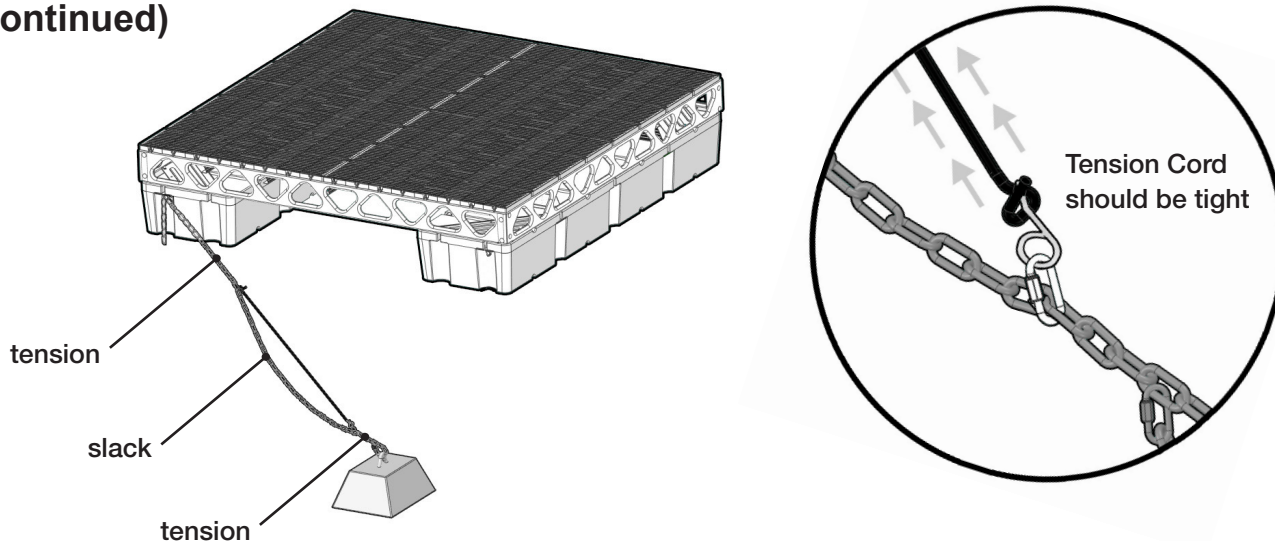


The chain should now have ample tension between the anchor and dock chain connection. Any slack on the chain should be between the Tension Cord clips.

If you are connecting the Tension Cord at **low tide** pull it until it is tight and then connect the Quick Link to the chain.

If you are connecting the Tension Cord at **high tide** stretch the cord as far as possible and connect the Quick Link to the chain.

## 3

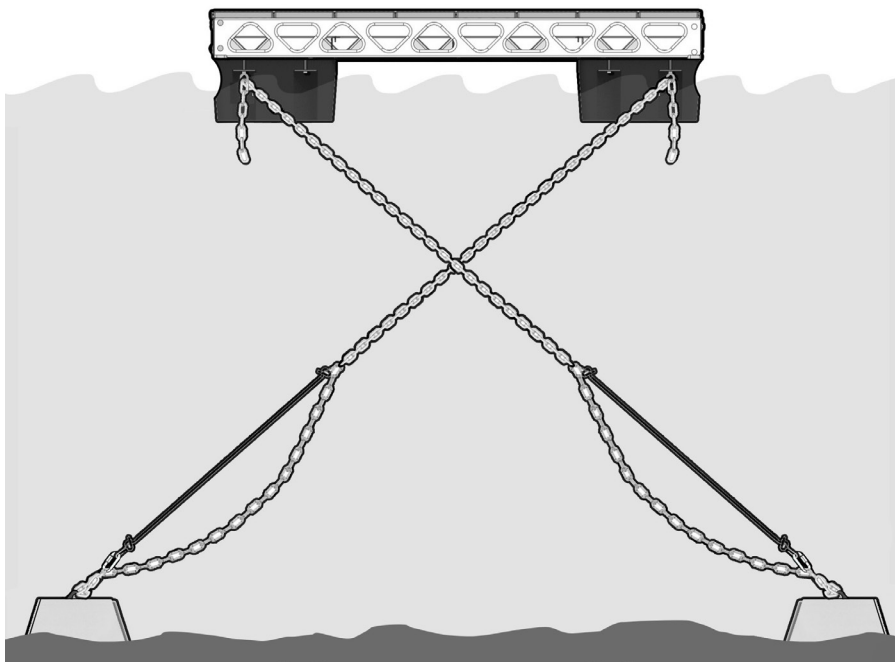

Follow Steps 1 and 2 for the opposite crossing chain and any additional anchor chains for your dock.